


Power & data cable

Type 4480K

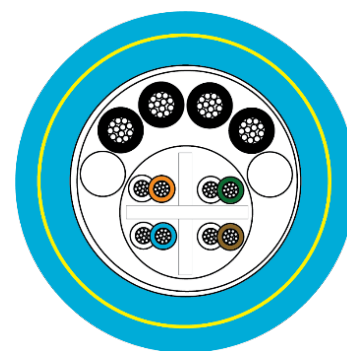

Construction characteristics

Ethernet element	2 x 0.13 mm ² (26 AWG) bare copper conductor insulated with polyolefin 2 cores twisted together (4 each) Colour white/orange, white/green, white/blue, white/brown 4 pairs stranded together with a central cross separator and with filler (textile or extruded) Inner jacket of special LSZH flame retardant and no corrosive compound Overall Polyester/Alu tape and tinned copper braid, coverage ≥80% (1 each)
Conductor	1 mm ² bare copper conductor insulated with special polymer Nominal diameter 2.70 mm (4 each). Colour black numbered 1-4
Filler	Water blocked compound
Inner tape	No hygroscopic tape
Inner shield	Tinned copper braid, coverage ≥ 85%
Inner jacket	Polyurethane, nominal thickness 1.2 mm, nominal OD 12.9 mm. Colour blue
Strength member	Aramid yarn braid, nominal thickness approx 0.4 mm
Outer jacket	Polyurethane, nominal thickness 1.2 mm. Colour blue

Mechanical characteristics

Diameter	16.10 mm ±0.5 mm
Weight in air	270 kg/km
Weight in seawater	57 kg/km
Min. bending radius	161 mm
Min. breaking strength	20 kN
Depth rating	3,000 m
Operating temperature range	-20°C - +80°C

Electrical and physical characteristics

Operating voltage	1,000 V for 1 mm ² conductor
Test voltage	4,000 Vac x 10 min for 1 mm ² conductor 1,5 kVac x 1 min for 4 x 2 AWG 26 (cond - cond) 1,5 kVac x 1 min for 4 x 2 AWG 26 (cond - shield)

Conductor resistance	19.5 Ω /km max for 1 mm ² conductor 145 Ω /km max for 4 x 2 AWG 26
Insulation resistance	≥ 5 G Ω xkm for 1 mm ² conductor + 4 x 2 AWG26

4 x 2 x 26 AWG

Capacitance	52 pF/m (cond - cond)
Nominal impedance	100 $\pm$ 15 Ω (1-100 MHz)
Propagation velocity	67% approx.
Max attenuation	$\leq$ 3.2 dB/100 m at 1.0 MHz $\leq$ 5.7 dB/100 m at 4.0 MHz $\leq$ 8.9 dB/100 m at 10.0 MHz $\leq$ 11.3 dB/100 m at 16.0 MHz $\leq$ 12.6 dB/100 m at 20.0 MHz $\leq$ 15.8 dB/100 m at 31.25 MHz $\leq$ 22.5 dB/100 m at 62.5 MHz $\leq$ 28.7 dB/100 m at 100.0 MHz
Data rate	1 Gbit/s (up to 90 m)

Other characteristics

Silicone free

RoHS-II/Reach Compliance