

TrustLink Connectors

Rugged reliability - excellent performance



Built with advanced technology, robust materials, and MacArtney connectivity expertise, the TrustLink series features a stainless steel construction as standard and is available in three shell sizes compatible with industry norms. These high-density connectors are suitable for the harshest marine environments, offering rugged durability and reliability. Their compact modular design is advantageous where limited space is a factor.

The TrustLink range is available in several configurations from 4 to 37 electrical contacts, along with a hybrid option incorporating 2FO and 4E contacts, as well as high-integrity, impedance-matched coaxial and power variants. Together the range offers excellent flexibility to subsea equipment and system operators.

Available in stainless steel (as standard) or titanium, it offers a service life of up to 25 years. Titanium delivers inherent corrosion resistance, whereas stainless steel may require cathodic protection, providing operators flexibility to match material choice to operational conditions.

All electrical connectors are available globally from MacArtney entities as a MacArtney-terminated assembly.

Reversible male/female inserts

The TrustLink series supports reversible male/female inserts, allowing either type to be mounted in the same housing. This design flexibility enables easier adaptation to system requirements and simplifies connector integration.

Highlighted specifications

- Depth rating 600 bar/8,700 psi
- Available in 3 standard shell sizes
- Up to 25 A rating
- Designed and tested to the EN 60664-1 and EN 50393-Table 5 standard

Features and benefits

- Available globally from MacArtney entities
- CCP connectors are available in overmould and boot versions
- Reversible male/female inserts
- Compact modular design
- Anti-seizing surface
- Available in multiple configurations
- Terminated by MacArtney only

Applications

- ROV/AUV/trenchers
- Naval systems and equipment
- Oceanographic systems, equipment and instrumentation solutions
- Seismic/ocean bottom systems
- Subsea nodes
- Underwater camera, video and lighting
- Survey systems and instrumentation
- Offshore oil and gas systems
- Subsea renewable systems
- Power supply for underwater pumps
- Underwater telemetry systems
- Dredging
- Harsh environment monitoring systems

Options

- Water blocked in case of cable damage*
- Available for pressure balanced systems*
- Back pressure rated to 600 bar*
- Other materials are available on request

*Only on Power/Signal



Specifications - Power/Signal - size A

Electrical

	4 contacts	8 contacts	12 contacts
Contact size:	14 AWG	18 AWG	20 AWG
Contact size:	2.1 mm ²	0.8 mm ²	0.5 mm ²
Voltage rating:	600 VAC/VDC	600 VAC/VDC	250 VAC/VDC
Dielectric withstand:	4,000 VAC	4,000 VAC	2,500 VAC
Current rating			
Up to 4 contacts loaded:	25 A	12 A	12 A
Current rating			
Up to 10 contacts loaded:		8 A	7 A
Current rating			
All contacts loaded:	25 A	8 A	7 A

Materials

Housing*:	Diamond polished AISI 316	Qualified pressure tested:	Mated 720 bar/10,400 psi
	Diamond polished Titanium G II	Depth rating:	Mated 600 bar/8,700 psi
Locking sleeves*:	Diamond polished	Temperature rating:	
	Nickel Aluminium Bronze	Water:	-4 to 70°C/25 to 158°F
	C63000	Air:	-25 to 70°C/13 to 158°F
	Diamond polished AISI 316	Storage:	-25 to 70°C/13 to 158°F
	Diamond polished Titanium G II		
Pressure cap*:	Diamond polished AISI 316		
	Diamond polished Titanium G II		
Dust cap:	POM	Creepage distances	EN 60664-1, tables F2 and F4
Electrical insert:	Glass reinforced high performance thermoplastic	and clearance:	
O-ring:	FPM-75	Electrical low voltage tests:	EN 50393, table 5

*Other materials on request


Environmental

Water:	-4 to 70°C/25 to 158°F
Air:	-25 to 70°C/13 to 158°F
Storage:	-25 to 70°C/13 to 158°F


Standards

Creepage distances	EN 60664-1, tables F2 and F4
and clearance:	
Electrical low voltage tests:	EN 50393, table 5



Face view (male)

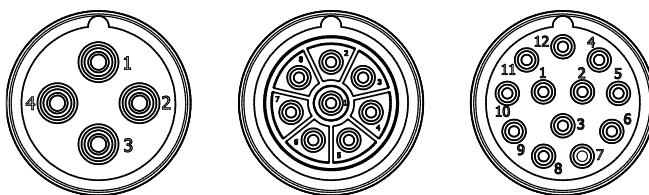






Mounting hole for BCR SA

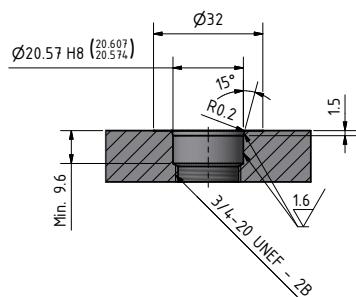


Mounting hole for FCR SA

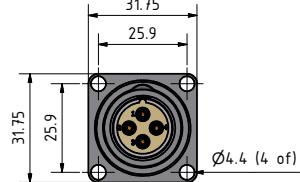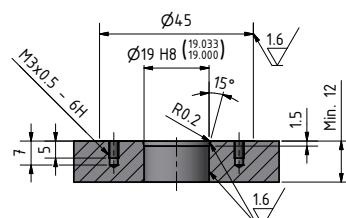

Terminated by MacArtney only.

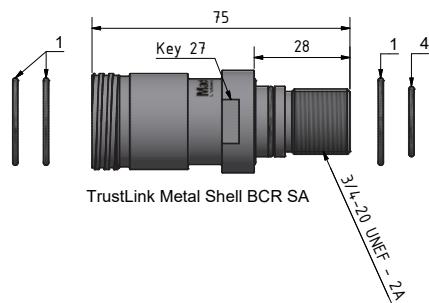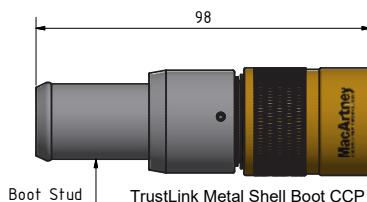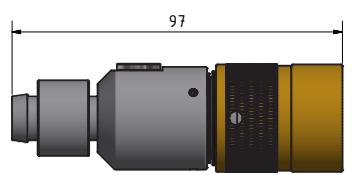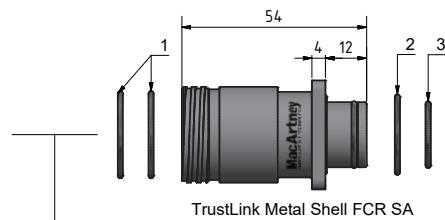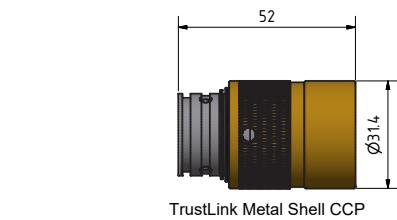

Boot A-B size for cable Ø7.5-Ø9.5
Boot A-B size for cable Ø9.5-Ø12
Boot A-B size for cable Ø12-Ø15

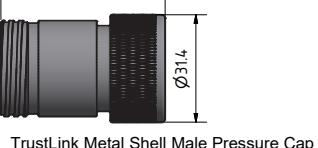

O-rings:

1. Ø22.5 x 1.5 FPM-75
2. Ø20.5 x 1.5 FPM-75
3. Ø16.5 x 1.5 FPM-75
4. Ø17.5 x 1.5 FPM-75

All measurements in millimetres (mm)



Specifications - Power/Signal - size B

Electrical

	16 contacts		19 contacts
Contact size:	2 x 16 AWG	14 x 20 AWG	20 AWG
Contact size:	1.3 mm ²	0.5 mm ²	0.5 mm ²
Voltage rating:	600 VAC/VDC	250 VAC/VDC	250 VAC/VDC
Dielectric withstand:	4,000 VAC	2,500 VAC	2,500 VAC
Current rating			
Up to 4 contacts loaded:	20 A	12 A	12 A
Current rating			
Up to 10 contacts loaded:	11 A	7 A	7 A
Current rating			
All contacts loaded:	9 A	6 A	6 A

Materials

Housing*:	Diamond polished AISI 316
Locking sleeves*:	Diamond polished Titanium G II
	Nickel Aluminium Bronze
	C63000
Pressure cap*:	Diamond polished AISI 316
Dust cap:	Diamond polished Titanium G II
Electrical insert:	Diamond polished AISI 316
O-ring:	POM
	Glass reinforced high performance thermoplastic
	FPM-75

Environmental


Qualified pressure tested:	Mated 720 bar/10,400 psi
Depth rating:	Mated 600 bar/8,700 psi
Temperature rating:	
Water:	-4 to 70°C/25 to 158°F
Air:	-25 to 70°C/13 to 158°F
Storage:	-25 to 70°C/13 to 158°F

Standards


Creepage distances and clearance: EN 60664-1, tables F2 and F4
Electrical low voltage tests: EN 50393, table 5

*Other materials on request



Face view (male)

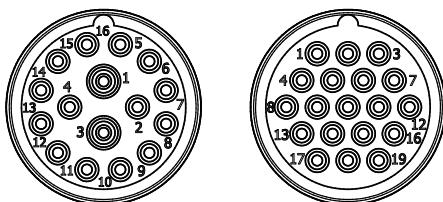


Mounting hole for BCR SB

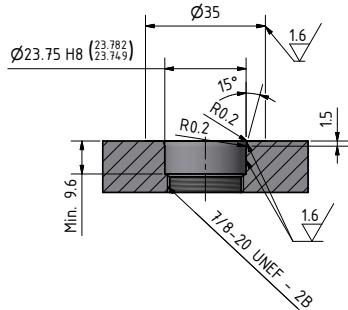

Mounting hole for FCR SB

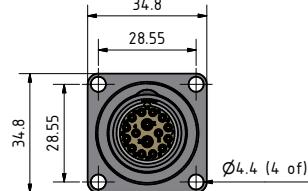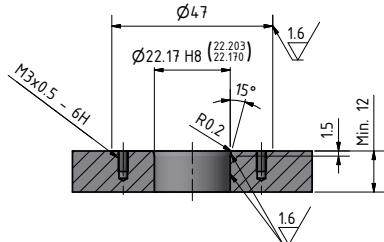

Terminated by MacArtney only.

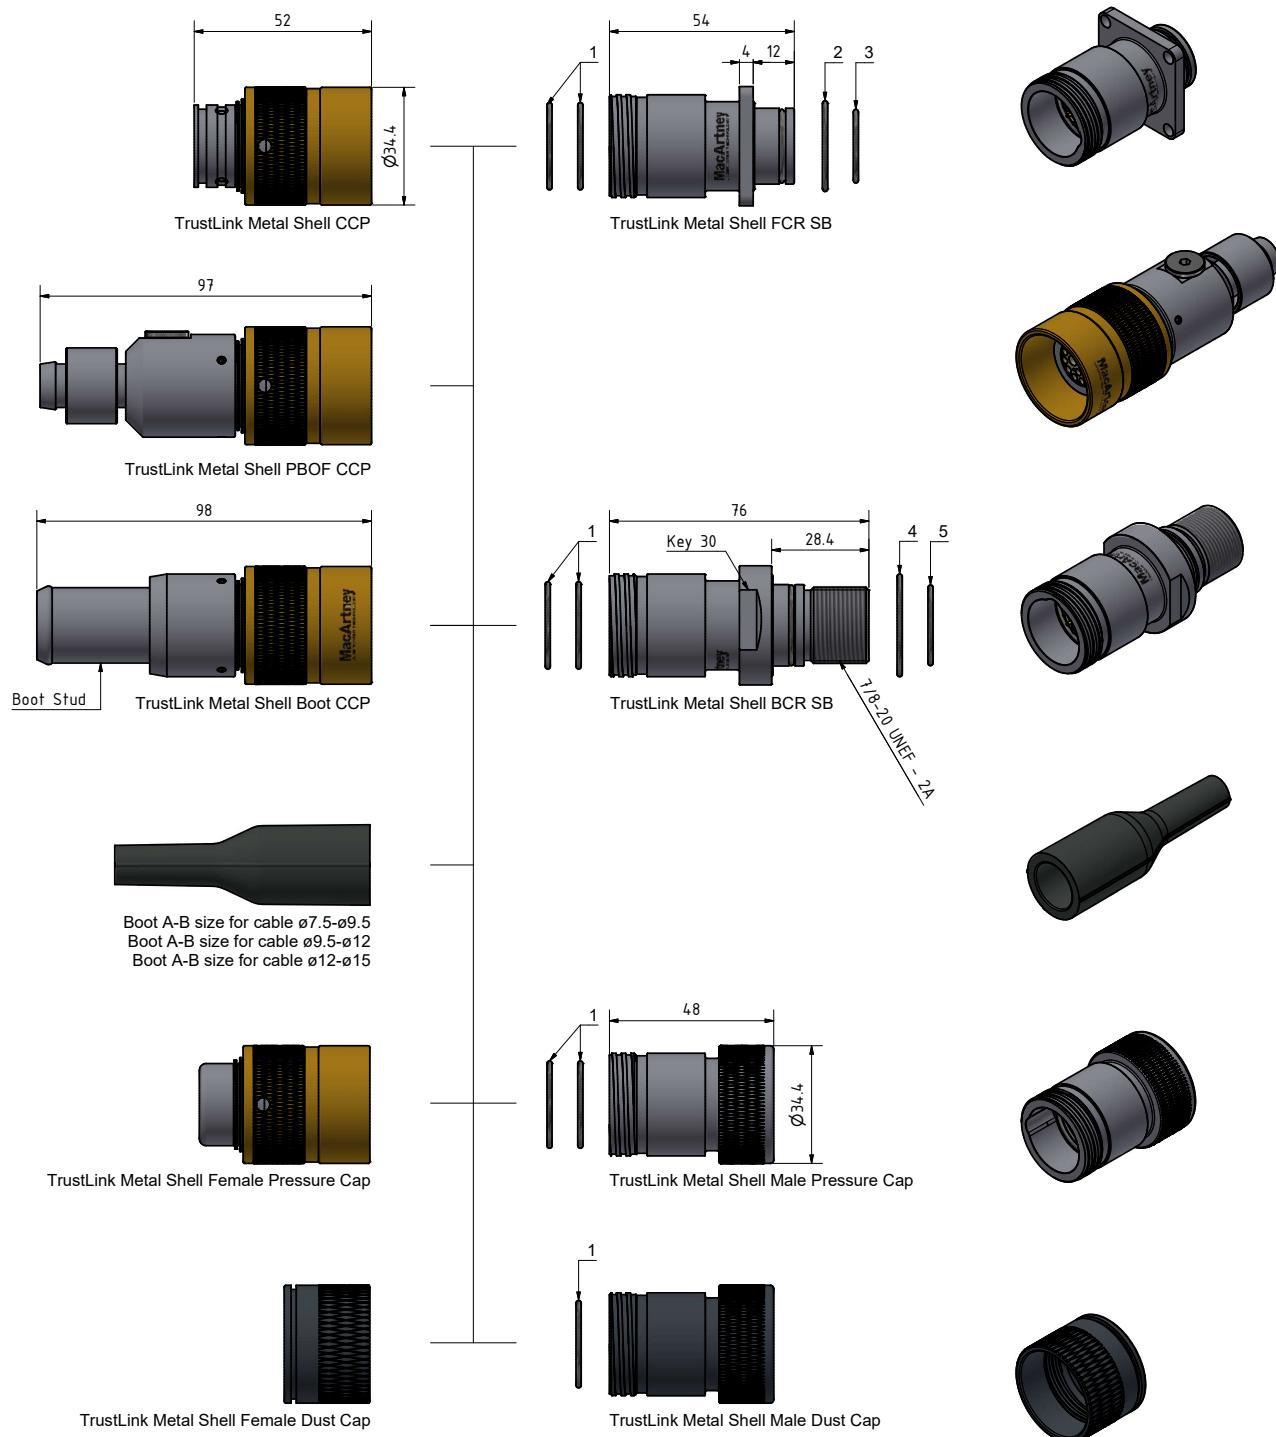

O-rings:

1. Ø22.5 x 1.5 FPM-75
2. Ø23.5 x 1.5 FPM-75
3. Ø18.5 x 1.5 FPM-75
4. Ø27.0 x 1.5 FPM-75
5. Ø20.5 x 1.5 FPM-75

All measurements in millimetres (mm)



Specifications - Power/Signal - size C

Electrical

	26 contacts	37 contacts
Contact size:	20 AWG	20 AWG
Contact size:	0.5 mm ²	0.5 mm ²
Voltage rating:	250 VAC/VDC	250 VAC/VDC
Dielectric withstand:	2,500 VAC	2,500 VAC
Current rating		
Up to 4 contacts loaded:	12 A	12 A
Current rating		
Up to 10 contacts loaded:	7 A	7 A
Current rating		
All contacts loaded:	5 A	5 A

Materials

Housing*:	Diamond polished AISI 316	Qualified pressure tested:	Mated 720 bar/10,400 psi
	Diamond polished Titanium G II	Depth rating:	Mated 600 bar/8,700 psi
Locking sleeves*:	Diamond polished	Temperature rating:	
	Nickel Aluminium Bronze	Water:	-4 to 70°C/25 to 158°F
	C63000*	Air:	-25 to 70°C/13 to 158°F
	Diamond polished AISI 316	Storage:	-25 to 70°C/13 to 158°F
	Diamond polished Titanium G II		
Pressure cap*:	Diamond polished AISI 316		
	Diamond polished Titanium G II		
Dust cap:	POM	Creepage distances	
Electrical insert:	Glass reinforced high performance thermoplastic	and clearance:	EN 60664-1, tables F2 and F4
O-ring:	FPM-75	Electrical low voltage tests:	EN 50393, table 5

*Other materials on request

Environmental


Water:	-4 to 70°C/25 to 158°F
Air:	-25 to 70°C/13 to 158°F
Storage:	-25 to 70°C/13 to 158°F

Standards


Creepage distances and clearance:	
Electrical low voltage tests:	EN 60664-1, tables F2 and F4

EN 50393, table 5



Face view (male)

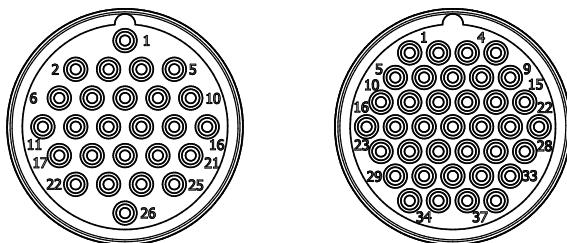


Mounting hole for BCR SC

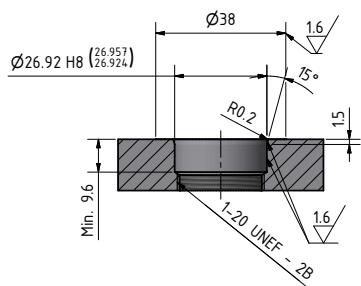

Mounting hole for FCR SC

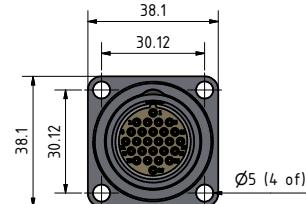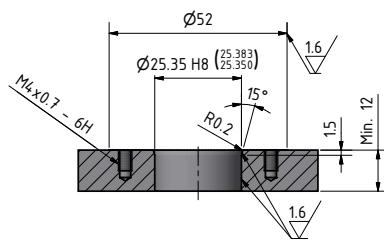

Terminated by MacArtney only.

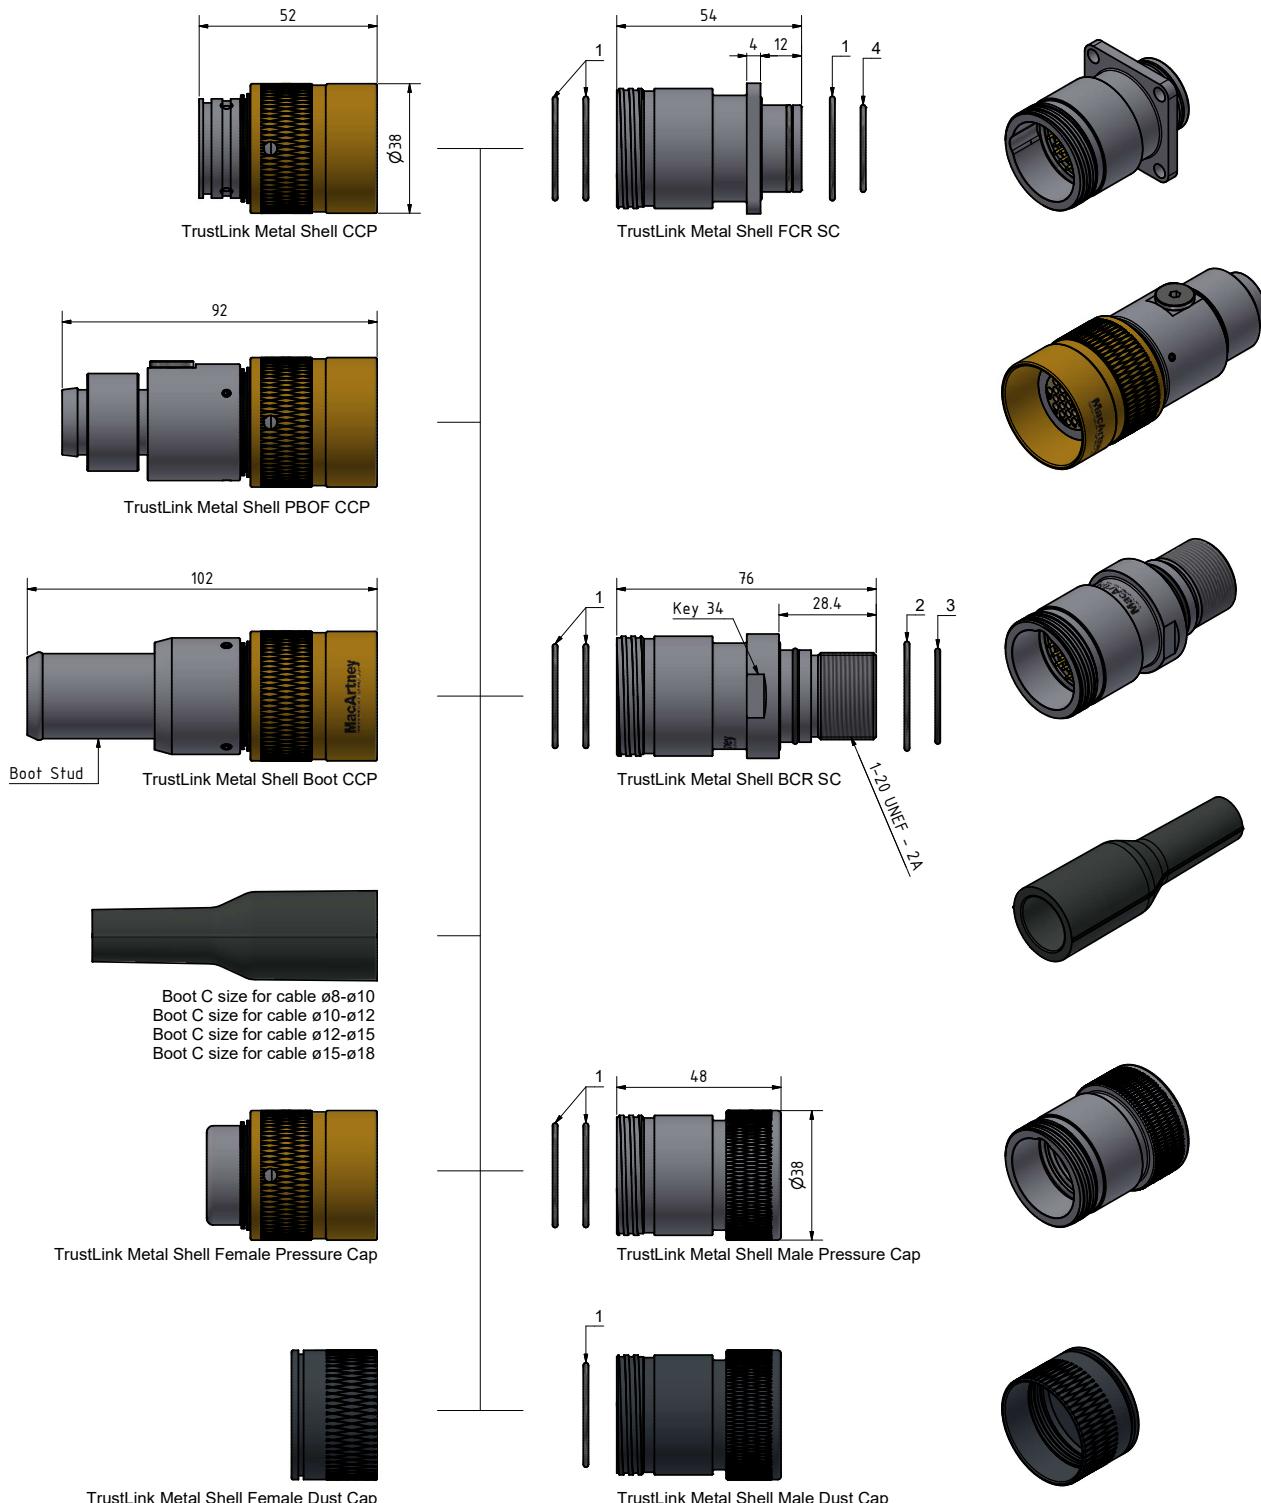

O-rings:

1. ø27.5 x 1.5 FPM-75
2. ø29.0 x 1.5 FPM-75
3. ø24.5 x 1.5 FPM-75
4. ø22.5 x 1.5 FPM-75

Blind plug:

6. 3/16" SAE port (Thread 3/8"-24UNF)

All measurements in millimetres (mm)

For technical information
and instructions

Scan QR code



Specifications - Coax - size B

Coax

	50Ω	75Ω
Frequency range:	Up to 4 GHz	Up to 4 GHz
Coax cable:	RG58(2550CC)	RG59(2575CC)
Coax pigtail (standard):	RG174 w SMB	RG179 w SMB
Voltage rating on coax:	600 V (pollution 2)	600 V (pollution 2)

Electrical

	6 contacts
Contact size:	18 AWG
Contact size:	0.8 mm ²
Voltage rating:	250 VAC/VDC
Dielectric withstand:	2,500 VAC
Current rating all contacts loaded:	10 A

Materials

Housing*:	Diamond polished AISI 316
Locking sleeves*:	Diamond polished Titanium G II
Pressure cap*:	Nickel Aluminium Bronze C63000
Dust cap:	Diamond polished AISI 316
Electrical insert:	Diamond polished Titanium G II
O-ring:	POM
	Glass reinforced high performance thermoplastic
	FPM-75

Environmental

Qualified pressure tested:	Mated 720 bar/10,400 psi
Depth rating:	Mated 600 bar/8,700 psi
Temperature rating:	
Water:	-4 to 70°C/25 to 158°F
Air:	-25 to 70°C/13 to 158°F
Storage:	-25 to 70°C/13 to 158°F

Standards


Creepage distances and clearance:	EN 60664-1, tables F2 and F4
Electrical low voltage tests:	EN 50393, table 5

Recommended cable



Type 2550CC or 2575CC

*Other materials on request


Face view (CX50 male)





Face view (CX75 male)

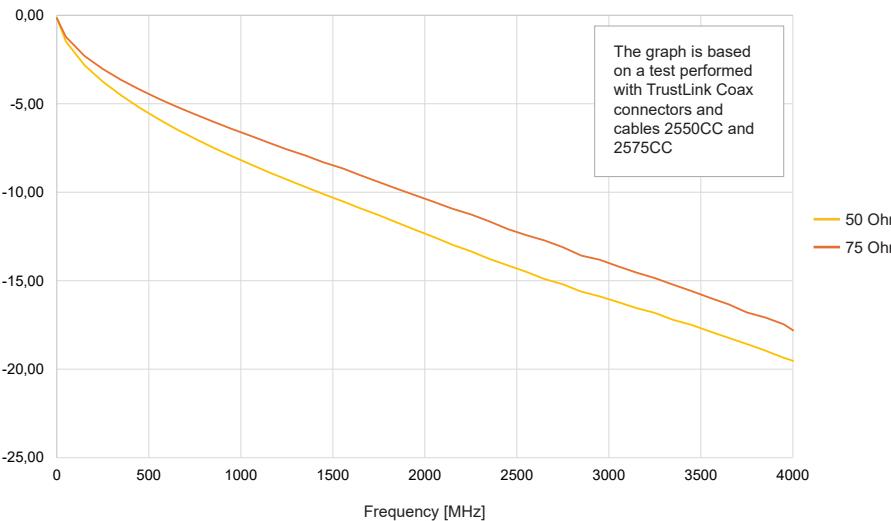


Mounting hole for BCR B

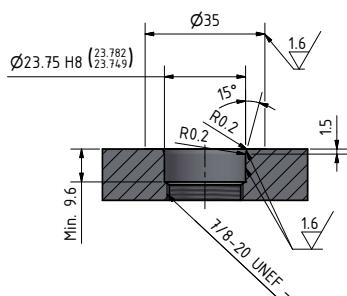

Mounting hole for FCR B

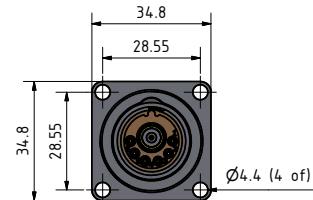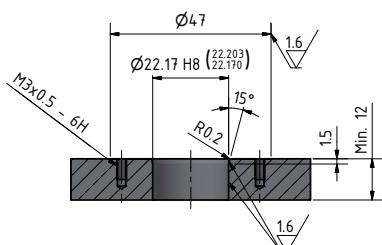

Terminated by MacArtney only.

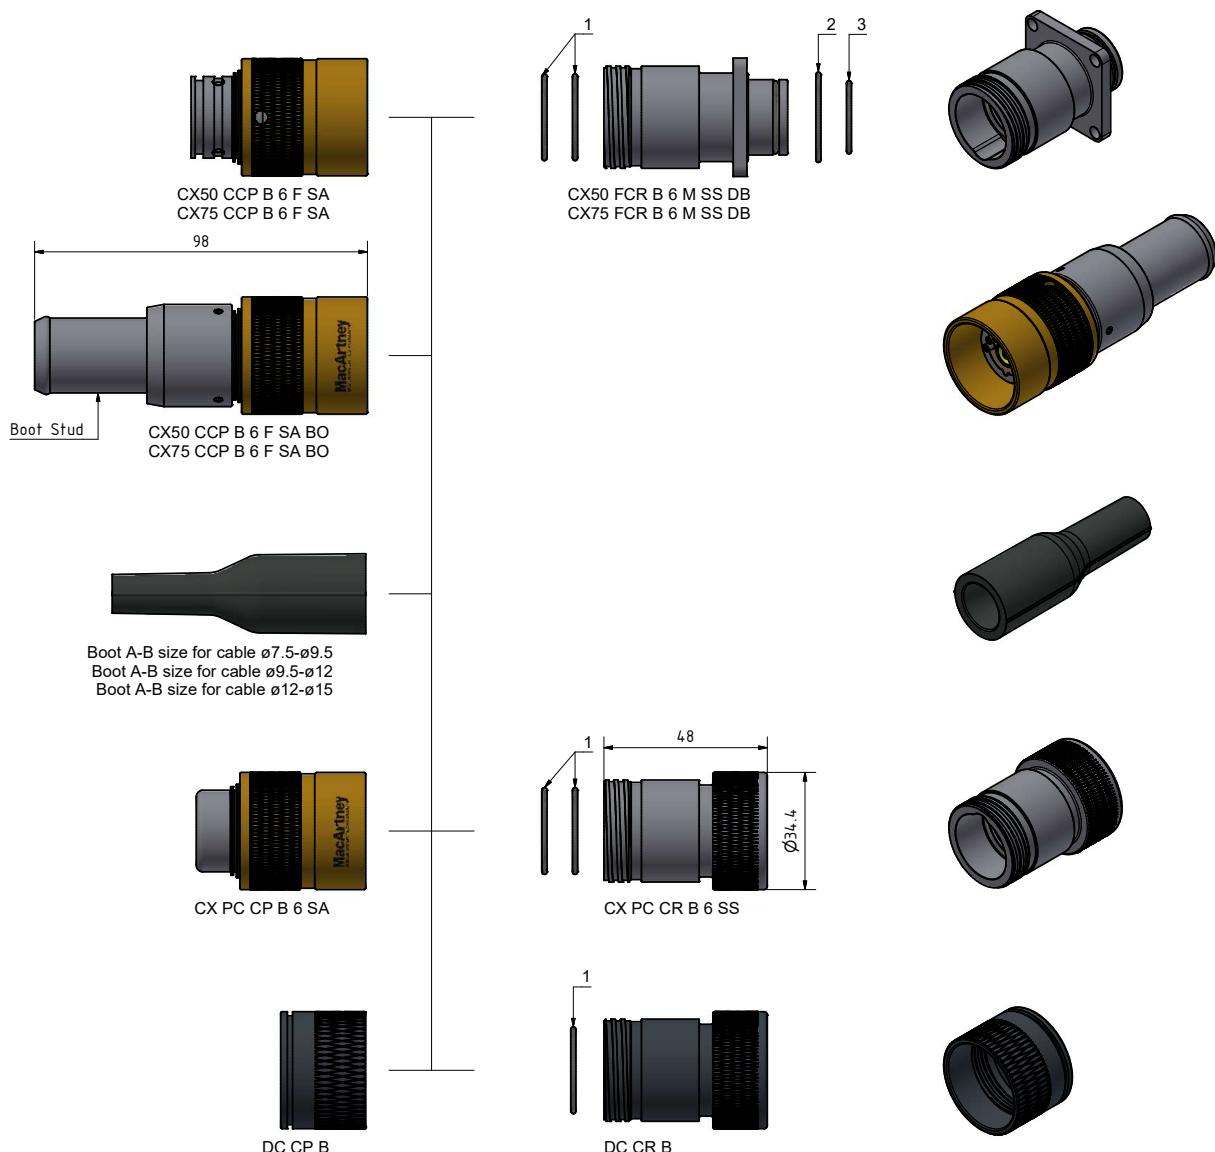

O-rings:

1. ø22.5 x 1.5 FPM-75
2. ø23.5 x 1.5 FPM-75
3. ø18.5 x 1.5 FPM-75
4. ø27.0 x 1.5 FPM-75
5. ø20.5 x 1.5 FPM-75

All measurements in millimetres (mm)



Specifications - Hybrid

Electrical

	4 contacts
Contact size:	2 x 16 AWG
Voltage rating:	600 VAC/800 VDC
Current rating:	13 A
Contact size:	2 x 20 AWG
Voltage rating:	250 VAC/350 VDC
Current rating:	5 A
Current rating - all contacts loaded:	36 A

Materials

Housing*:	Diamond polished AISI 316
Locking sleeves*:	Diamond polished Nickel Aluminium Bronze
	C63000
Pressure cap*:	Diamond polished AISI 316
Dust cap:	POM
Insert:	Stainless steel
O-ring:	FPM-75

*Other materials on request

Optical (single mode)

Wavelength:	1,310 to 1,550 nm
Attenuation:	Max 2.5 dB, Typical 1.0-1.5 dB (when mated)
Fibre types:	9/125 μ m
Optical passes:	2 passes

Optical specifications (multi mode)


Wavelength:	850 to 1,300 nm
Attenuation:	Max 2.5 dB
Fibre types:	50/125 μ m
Optical passes:	2 passes

Environmental


Qualified pressure tested:	Mated 720 bar/10,400 psi
Depth rating:	Mated 600 bar/8,700 psi (dry box)
Temperature rating:	
Water:	-4 to 70°C/25 to 158°F
Air:	-25 to 70°C/13 to 158°F
Storage:	-25 to 70°C/13 to 158°F

Recommended cable


Type 3644CC or 3780CC

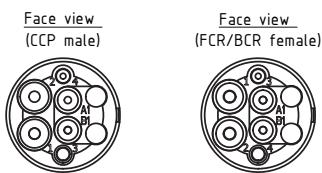


Mounting hole for BCR Hybrid

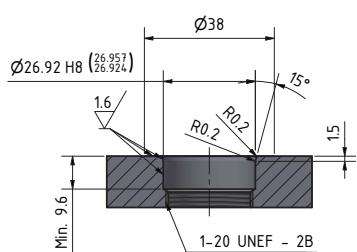

Mounting hole for FCR Hybrid

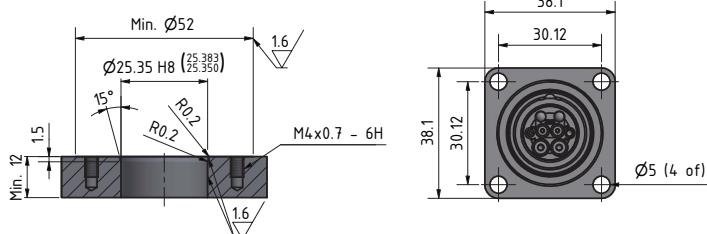

Terminated by MacArtney only.

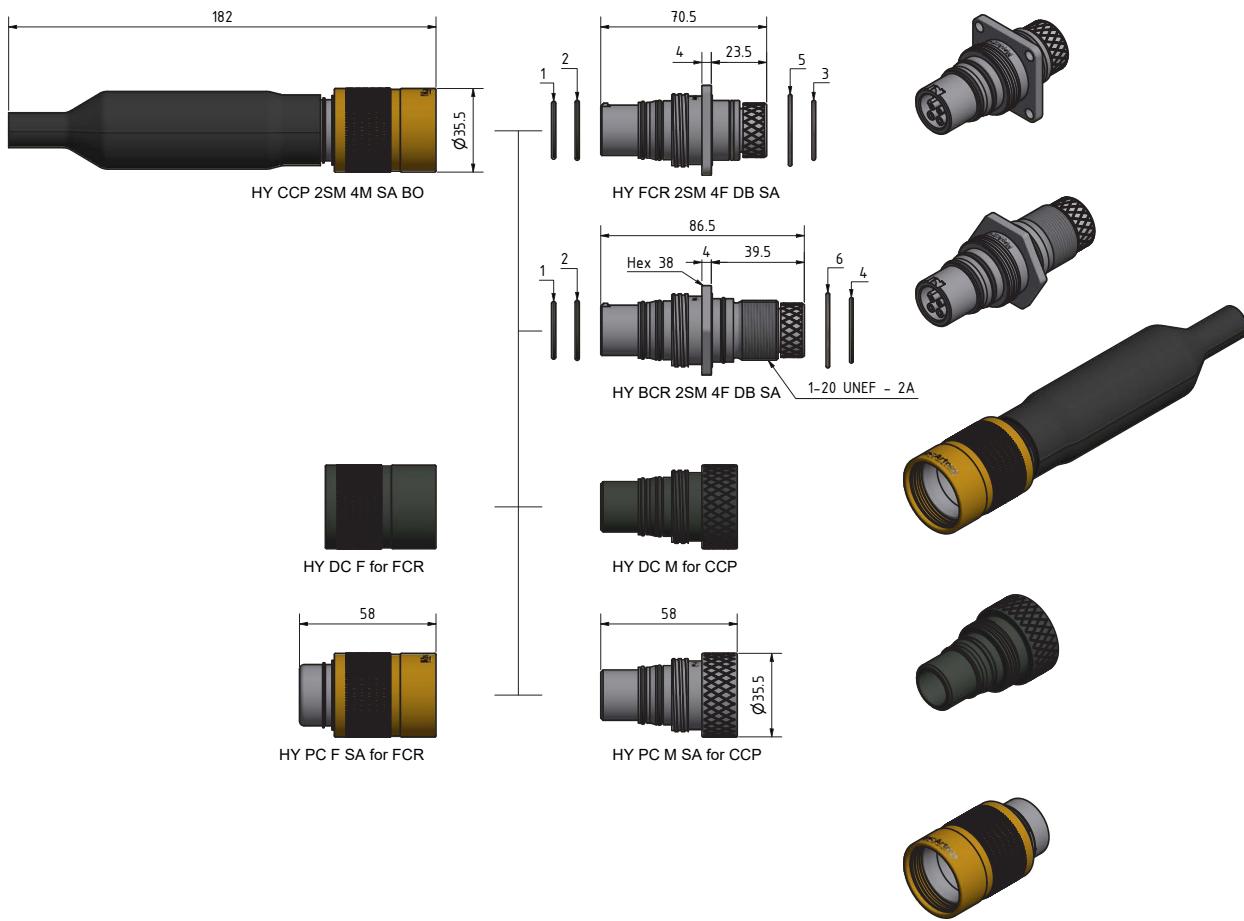

O-rings:

1. Ø20.35 x 1.78 FPM-75
2. Ø21.95 x 1.78 FPM-75
3. Ø22.50 x 1.50 FPM-75
4. Ø24.50 x 1.50 FPM-75
5. Ø27.50 x 1.50 FPM-75
6. Ø29.00 x 1.50 FPM-75

All measurements in millimetres (mm)



MacArtney
UNDERWATER TECHNOLOGY

www.macartney.com